


Share My Screen 1080P

USB-C Wireless Display Adapter with Hub WDA-01



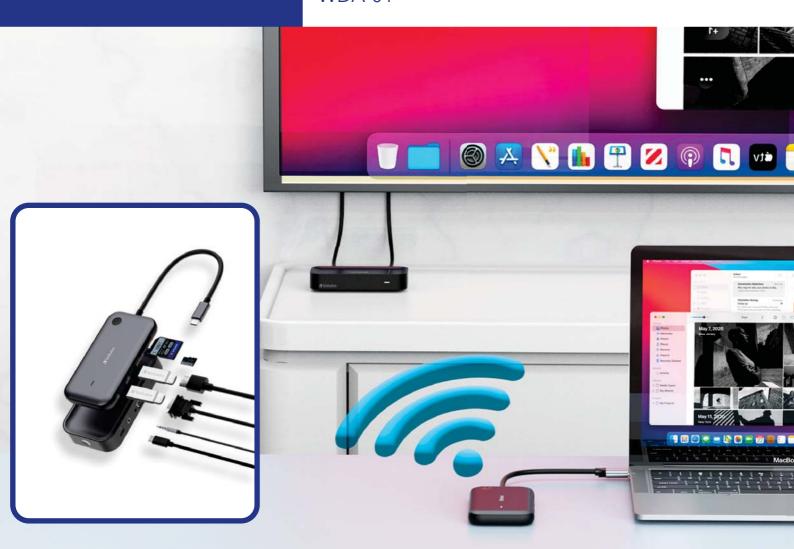

Wireless display adapter



Video resolution up to 1080P



HDMI / VGA video connection



Hub: 2x USB-A, SD & microSD slots

High-definition Wireless Presenting

Share My Screen 1080P Wireless Video Adapter supports both HDMI and VGA connections, allowing you to easily connect computers, laptops, tablets, and smartphones to 1080P monitors, TVs, or beamers.

Easy pairing ensures accessibility for all levels of technical expertise, while universal compatibility accommodates a wide range of USB-C enabled devices. Enjoy flexibility in meeting rooms and beyond with a reliable 10-meter wireless range.

Its compact and portable design is ideal for professionals and students on the go. Unleash the WDA-01's power with hub features such as dual USB-A ports and SD/microSD slots – where wireless clarity meets unrivalled convenience.



Share My Screen 1080P

USB-C Wireless Display Adapter with Hub WDA-01

| General Information | |
|------------------------------|---|
| Material | ABS |
| Colour | Black/Grey |
| Compatible devices | Transmitter: Notebook, Tablet PC, Smartphone |
| - | Receiver: TV, Monitor, Projector |
| Transmission distance | Max. 10 meters |
| Transmitter | |
| USB Connector | USB-C™ |
| USB Interface | USB 3.0 |
| USB Data transmission | Up to 5 Gbps. Support USB-C 3.2 Gen1, 5G data transmission, downwards compatible USB 2.0. |
| Video | Support DP Alt Mode 1.4 |
| Billboard | Supported |
| USB-A ports | 2x USB-A 3.2 Gen1, 5Gb/s data transmission, downwards compatible with USB 2.0, 5V 0.9A@4.5W |
| SD / microSD supported cards | SDXC, SDHC, SD, MMC, RS-MM, Micro SDXC, Micro SDHC, Micro SD |
| SD / microSD slot | Read: 50-104Mb/s , Write: 30-80Mb/s |
| WiFi | Supports wireless dual frequency Protocol standard IEEE 802.11a/b/g/n/ac |
| Function Key | Single click to disconnect monitoring Long press 5s to enter pairing mode Long press 10s to factory reset |
| Cable length | 15 cm |
| Receiver | |
| HDMI Bandwidth | Max. 6G |
| HDMI Resolution/Refresh rate | 1080p/60Hz/48bit; 720p/60Hz/48bit, 3D/1080p / 720p etc. |
| HDMI Audio | 8 channel; sampling rate192khz/24bit, support LPCM, DTS, AC3, HBR |
| HDCP Version | HDCP 1.4 |
| VGA | Resolution/Refresh rate 1080p/60Hz/24/bit; 720p/60Hz/24bit;480p/60Hz/24bit |
| Audio | Interface 3.5mm/ level4; 8 channel; sampling rate 192khz/16bit |
| Function Key | Long press 5s to enter re-pair mode |
| Power supply | 5V/1A@5W via USB-C™PD port (USB charger not included) |
| Cable | USB-A to USB-C™ cable (80cm) |

